



OPTOS

SCONCES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Accent lighting sconce with dual lenses, lens unit swivels 359° where it attaches to the canopy.

LAMPING

Standard: 40W low-pressure G9 Halogen 120V lamps, included.

Lamps are suitable for use in an open fixture.

LED: 5W LED Replaceable source 120V, dimmable, included.

LENSES

3.5" Diameter. Domed flood light glass lenses are available in combinations.

Options include Clear, Frosted, Dicro Warm, Dicro Cool.

CANOPY

Canopy (4.375" Sq.) and Faceplate (5") is plated metal.

METAL FINISH


Canopy and lens unit hardware shall be finished in Chrome or Brushed Aluminum

MOUNTING


Installs directly to a 4" junction box. Unit secures with concealed screws.

LABELS


UL or ETL Listed. Suitable for Damp Locations (interior use only).

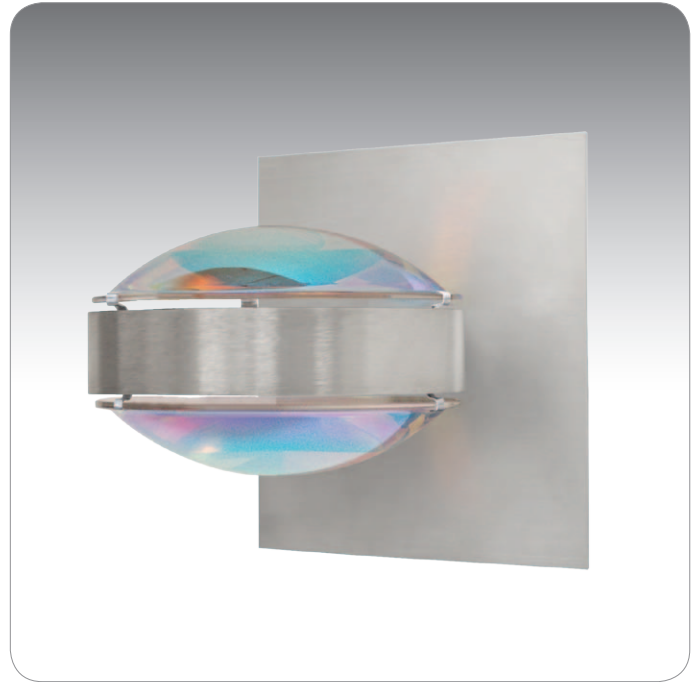


OPTOS SHOWN IN COOL DICRO/COOL DICRO (CD)CD

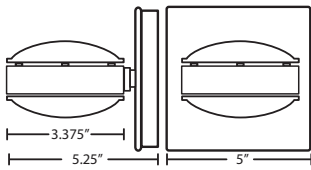


CL
CLEAR

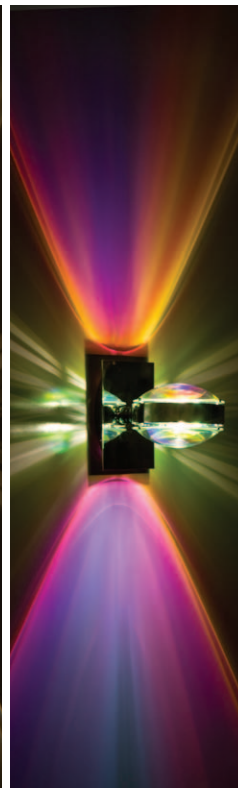

CD
COOL DICRO

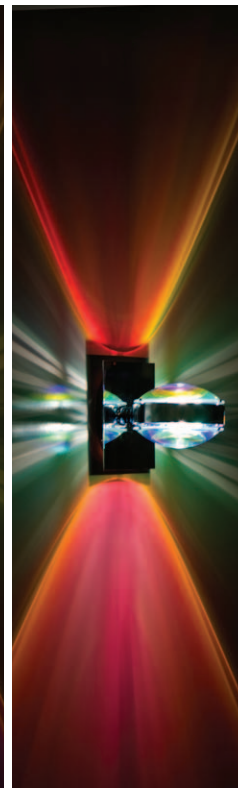

WD
WARM DICRO

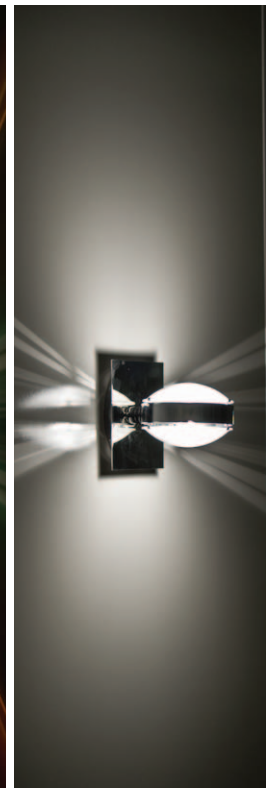

FR
FROST

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14



OPTOS

SCONCES WALL

ORDERING:

FIXTURE/DECOR	LENS COMBINATION	LAMP OPTIONS	METAL FINISH
OPTOS1W Sconce	CDCD Cool Dicro/Cool Dicro	(blank) 40W G9 Hal	BA Brushed Alum.
	CDWD Cool Dicro/Warm Dicro	LED 5W LED 120V, dimmable	CR Chrome
	CLCD Clear/Cool Dicro		
	CLCL Clear/Clear		
	CLFR Clear/Frost		
	CLWD Clear/Warm Dicro		
	FRFR Frost/Frost		
	FRCD Frost/Cool Dicro		
	FRWD Frost/Warm Dicro		
	WDWD Warm Dicro/Warm Dicro		

Ex. OPTOS1W-CLCL-BA

Optos Wall Sconce w/ Clear and Clear Lens Combination, Brushed Aluminum Finish

LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Project Information: