



SPECIFICATIONS:

DESCRIPTION

Cable-hung or stem-mount pendant with handcrafted glass diffuser. Two sizes are available.

LAMPING

Standard: 100W, A19 120V incandescent, suitable for dimming, *not included.*

CFL: 26W 4-Pin CFL with non-dimming electronic ballast. 120V, *lamp not included.*

GU24 CFL: Self-ballasted GU24 lampholders. 26W max, 120V, *lamp not included.*

LED: 10W GU24 LED Lamp 120V, dimmable, *included.*

DIFFUSER

Shades shall be handcrafted glass in various decors.

Opening sizes: 3x7mm holes.

SUSPENSION

Cable-hung: 3x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket tint coordinates with metal finish. 5" Dia. canopy is plated stamped steel. Bronze or Satin Nickel.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only). Consult factory concerning lower wattage labeling for energy requirements.

location: **DAMP** interior

CFL GU24 LED



Mosaic Onyx

Opal Stone




All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.



ORDERING:

Tamburo 16v2:

Lamp: 3x 100W A19

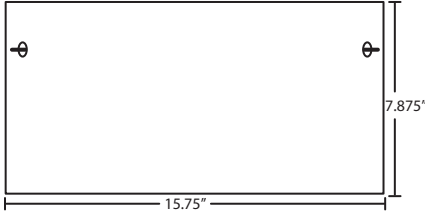

Tamburo 16:


Lamp: 3x 100W A19



Connection*	Glass	Decor	Lamp Options	Metal Finish	Options
3x Cable Fixture 1KV 1 Lt. Flat	4007 16"x11.75"	07 Opal Matte CF Copper Foil	(blank) 3x 100W A19 Incan I1 3x 26W TBX 120V R1 3x 26W TBX 277V	BR Bronze SN Satin Nickel	L 15' cord
Stem Fixture 1KT 1 Lt. Flat	4008 16"x7.875"	CH Cherry GF Gold Foil HB Habanero KR Chalk MA Magma MG Marble Grigio MX Mosaic Onyx OK Oak SF Silver Foil TN Titan 00 Clear Stone CS Stone Copper Foil GS Stone Gold Foil OS Opal Stone SS Stone Silver Foil	GU24 3x 26W GU24 120V LED 3x 10W LED 120V		


PENDANT OPTIONS:

CABLE-HUNG PENDANT



- 3x 10' aircraft-quality stainless steel cable
- 1KV Series: 3x lampholder includes flat glass glare shield
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3", 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel

LED 120V PENDANTS:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- 3 year limited warranty

ACCESSORIES:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

- T20A-SN** or **T20A-BR** Adj. Section
- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section

Project Information: