


# Illuma-Flex Track Low Voltage

Track

Туре	
-09	-174
P6227	
P6228 🗌	

	Finish					
	Brushed	Urban	Support	Dimensions (Inches)		
Catalog No.	Nickel	Bronze	Stems	Α	В	C
P6227	-09	-174	3 (included)	7/8	4-7/16	72 (6′)
P6228	-09	-174	6 (included)	7/8	4-7/16	144 (12')

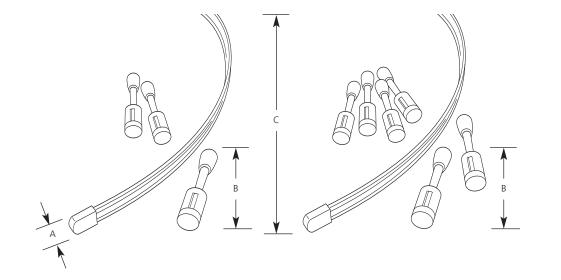

### **Specifications:**

#### General

- Flexible 12 volt track
- Brushed nickel plated finish
- Track can be bent to desired shape without the use of tools
- Can be field cut to any desired length
- Complete with end caps and support stems (see below)
- Must be connected to a UL listed 12 volt transformer of appropriate size.

# **Mounting**

- Ceiling mounted on support stems and surface transformer
- Brushed nickel plated support stems are included
- Support stems attach to track by removing a lower cap, sliding the track into the support, and replacing the lower cap.
- Support stems are 3/8" wide, 4-3/4" high
- Mounting anchors are included

# Electrical

- Track is a PVS plastic extrusion with plated brass buss bars inserted on each side
- Track must be connected to an 12 volt transformer of appropriate size (See P8776-09)

### **Labeling**

• UL-CUL listed

Progress Lighting Post Office Box 5704 Spartanburg, South Carolina 29304-5704