



BESA LIGHTING

8 FT. 60W SCOPE LED RAIL KIT

SPECIFICATIONS:

DESCRIPTION

8' low voltage 60W Monorail kit with 3 pendants and 3 spotlights.
Includes LED-only surface power supply and support hardware.
Monorail section is field-bendable without tools.

COMPONENTS

Package includes:

- 1- Eight foot rail section
- 1- 60W surface-mount electronic transformer, 120V input
- 3- Scope pendants
- 3- Scope spotlights
- 6- 5W LED MR16 lamps
- 6- Rail adapters
- 3- Rigid Standoffs
- 2- Rail end caps

COMPATIBILITY

60W Low-profile LED rail power supply.
Specifically for use with LED spotlights and pendants.
Supports up to (9) 5W max LED spotlights or pendants.
No-load 12V dimmable electronic transformer fits in the junction box.
No remote transformer required.
Not recommended for standard halogen-lamped items

DIMMING

The included LED MR16 lamps are dimmable.

METAL FINISH



Bronze or Satin Nickel.

MOUNTING

Transformer canopy installs directly to a 4" octagonal ceiling box.
All mounting hardware included. Not suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).

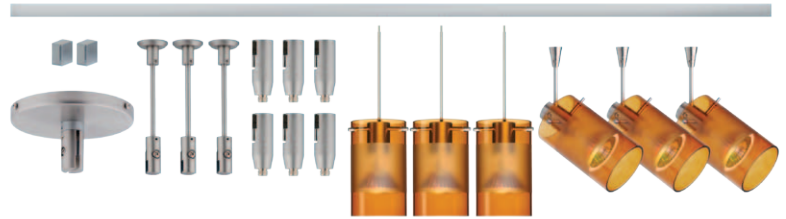

ORDERING:

SYSTEM	KIT	SCOPE OPTION	METAL FINISH	OPTIONS
R12 12V Rail	K08LE 8 Ft. LED	6524EA Amethyst/Frost	BR Bronze	(blank) 120V
		6524EC Clear/Frost	SN Satin Nickel	277 277V
		6524EG Armagnac/Frost		
		6524EL Olive/Frost		

Ex. R12-K08LE-6524EC-SN

8 Ft. Scope Clear/Frost LED Rail System, 120V

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14