

Job Name:		Item Number:	
Specifier Name:		Sales Agency:	
Specifier Contact:		Agency Contact:	
Fixture Type:		Comments:	
Quantity:		Approval:	

2 Light LED Disk Kit 3000K



Description

Our LED Disk Lighting Kits offer two and three light, all-in-one packages for added convenience. Each package includes a plug-in 12V 30 watt zero load transformer, a LED Disk Connection Hub and all necessary mounting components. Up to six LED Disk Lights can be powered from one transformer and connection hub.

Specifications

Item Number	98862SW-787
Finish	Plated Bronze
Dimensions	D: 3" H: 5/8"
Wire / Cord	96" (color/Black)
Switch Type	On/Off Switch
Mounting Proc.	Dual Mount
Connection	Plug Into Box
Voltage	12V
Color Temperature	3000°K
Lumens	340
Watts Consumed	9.5 watts
Watts Rated	8 watts
Efficacy	35.8 lm/w
Color Rendering	>85 CRI
Rated Average Life	40,000 hours to 70%
Safety Listing	cETL Listed for Damp Locations
Warranty	5-Year Limited Warranty

Instruction Sheets

- Trilingual (English, Spanish, and French) (HC-1887FS)


Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	98862SW-787	1	785652153174	4.5	4	5	0.052	0.8	Yes
Master Pack	98862SW-787	3	10785652153171	15.5	5	5.5	0.247	3.1	Yes
Shipping Master		30	20785652153178	16	10.125	29.5	2.766	33.9	Yes

Photometric Diagram:

Zone (Degrees)	Lumens	% of Lamp
0° – 30°	56.7	32.5%
0° – 40°	93.4	53.6%
0° – 60°	157.7	90.4%
0° – 90°	174.4	100%
90° – 180°	0	0.0%
0° – 180°	174.4	100%

		Horizontal Angle (Degrees)		
		0°	45°	90°
Vertical Angle (Degrees)	0°	60540	60540	60540
	45°	58070	58070	58070
	55°	48620	48620	48620
	65°	32180	32180	32180
	75°	1326	1326	1326
	85°	0	0	0

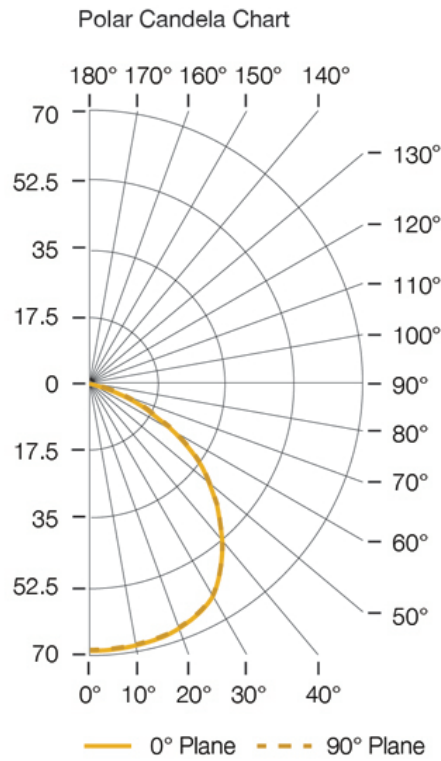

Photometry based on (1) 98860SW(-xx) LED Disk in 3000°K CCT.

Component Diagram:



STEP 1

Choose LED Disks
 Select number of disks, housing color and color temperature needed for your project.



STEP 2

Select Connectors & Accessories
 Order connection hubs, additional connector cords, extra cord mounting clips, wiring compartments and fused plugs needed for your installation. (Each disk includes a 36" linking cable.)



STEP 3

Select Transformers
 Multiply the number of disks in your system by 4 watts to determine transformer size needed. LED disks are 12V AC for use with 12V power supplies.



7400 Linder Ave. | Skokie, Illinois 60077 | 800-347-5483
 © 2013 Sea Gull Lighting LLC, a Generation Brands Company.

